



Technical data

Uniflex Shower Channel, room *

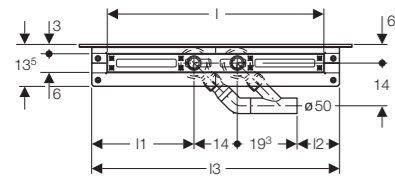

Size	Product Code
700	154.100.00.1
800	154.101.00.1
900	154.102.00.1
1000	154.103.00.1


Uniflex Shower Channel, wall *



Size	Product Code
700	154.105.00.1
800	154.106.00.1
900	154.107.00.1
1000	154.108.00.1

* also available in sizes 1100, 1200 and bespoke lengths to order.


Uniflex Shower Channel Inlay *










Size	Stainless Steel	White	Bespoke
700	154.350.00.1	154.364.11.1	154.360.00.1
800	154.351.00.1	154.365.11.1	154.361.00.1
900	154.352.00.1	154.366.11.1	154.362.00.1
1000	154.353.00.1	154.367.11.1	154.363.00.1

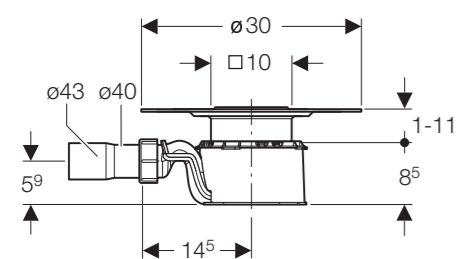* also available in sizes 1100, 1200 and bespoke lengths to order.

Shower Drain



Drain for flat showers
154.005.00.1

-  Standard grating screwable
154.300.00.1
-  Architectural squares
154.301.00.1
-  Radial
154.302.00.1
-  Trendy
154.303.00.1
-  Classic natural
154.304.00.1
-  Puristic square
154.305.00.1
-  Puristic circle
154.306.00.1

Geberit Sales Ltd
Geberit House
Academy Drive
Warwick
Warwickshire
CV34 6QZ

Freephone: 0800 077 8365
Fax: 0844 800 6604
Eire: +44 (0) 1926 516 800
Literature: 0800 007 5133

www.geberit.co.uk


Finishing touches for wet rooms

April 2009





Uniflex shower channel

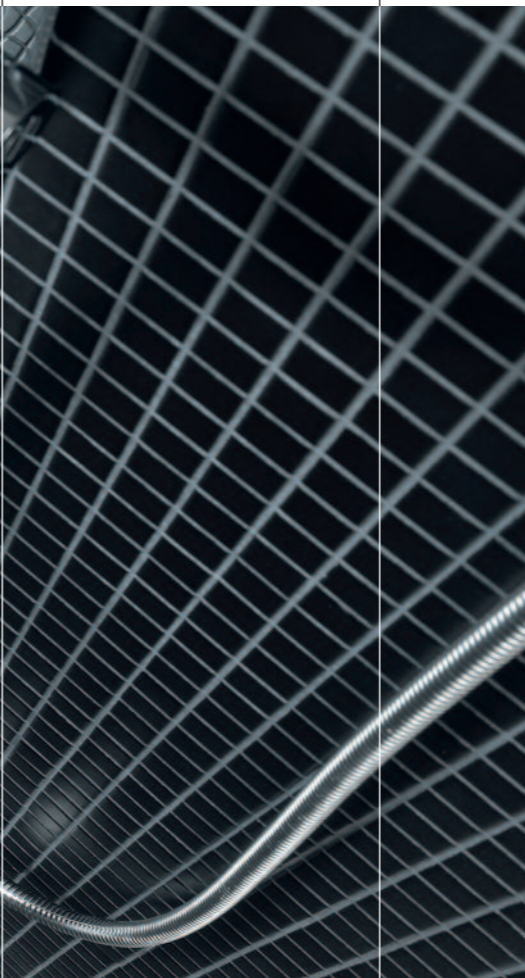

Uniflex shower drain



The Uniflex shower channel and shower drain are the perfect finishing touch for wet room installations.

The channel is fixed to the floor with adjustable feet so that it can be installed efficiently and insulation layers laid tidily.

The two Uniflex shower channel designs, based on the popular materials stainless steel and enamel, provide a stylish finish to modern bathrooms. In addition, the shower channel can also be installed with other materials such as wood, Corian® or the tiles already used in the bathroom.

The height, inclination and offset of the channel frame can be adjusted to suit the thickness and size of tiles, the incline and the tile grid. The Uniflex shower channel is available in lengths of 700, 800, 900, 1000, 1100 and 1200mm with a minimum construction height of 112mm.

Facts:

- Drainage capacity of 0.8l/s
- High flexibility and error tolerance
- Complete acoustic and tension decoupling
- Minimum construction height 112mm
- Available in heights of 700, 800, 900, 1000, 1100, 1200mm as standard
- Two versions available for in-floor and against the wall installations



The Uniflex shower drain for wet room installations has a minimum installation depth of just 95mm and maximum depth of up to 195mm with the choice of seven different gratings.

Installation is made easy through floor fixings for exact positioning, and once the flooring has been laid, the incline of the Uniflex floor channel can be adjusted as well as the height and horizontal position.

Facts:

- Drainage capacity of 0.74l/s
- Floor fixings to enable exact positioning
- Comes with 1½" waste adapter - UK size
- Minimum construction height 95mm maximum 195mm
- Screwable standard grating option available

